


Aero V 1500 x 325 *colour: RAL 2008* 

Integrated thermostatic valve, angled, left, chrome SLIM thermostatic head, chrome Integrated pipe-masking set, chrome









design: Jacek Ryń

## Connections:











## We recommend:


A set of integrated thermostatic valves for ZX connection





Integrated pipe-masking set





# Available sizes:

















# Specifications:

Working pressure: 0,7 MPa Maximum operating temperature: 95°C

A	B ↔	C1 [mm]	C2 [mm]	75 65 20℃ [W]	55 45 20°C [W]	D [mm]	E [mm]	F [mm]	[dm³]	<u>(kg</u>	Product configuration codes, 4
900	325	50	255	286	149	255	745	77,5	3,25	8,74	WGARV090032
1200	325	50	255	366	190	255	1045	77,5	4,57	11,57	WGARV120032
1200	410	50	340	458	237	340	1045	77,5	5,72	14,48	WGARV120041
1500	325	50	255	446	229	255	1345	77,5	5,90	14,41	WGARV150032
1500	410	50	340	558	286	340	1345	77,5	7,37	18,03	WGARV150041
1800	325	50	255	526	268	255	1645	77,5	7,22	17,24	WGARV180032
1800	410	50	340	657	334	340	1645	77,5	9,03	21,57	WGARV180041


www.termaheat.pl 20160108wolka page 2 of 5









ZX



SX




76 ÷ 84

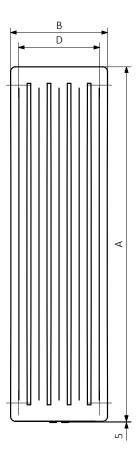

 $A-Height \quad B-Width \quad C1-C5-Distance \ between \ pipe \ centres \quad D-Horizontal \ distance \ between \ mounting \ bracket \ centres \\ E-Vertical \ distance \ between \ mounting \ brackets \quad F-Distance \ between \ a \ mounting \ bracket \ and \ the \ bottom \ of \ the \ radiator$ 

#### Profile:



www.termaheat.pl 20160108wolka page 3 of 5







Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

The construction of a water and dual fuel radiator product and configuration code:

WGALE054030

K916SX

PRODUCT CODE (located in the table for the product)

CONFIGURATION CODE (supplemented by hand)

Configuration



## Zinc powder primer


**C** – Code of zinc powder primer is an extra processes

WLALE054030 K916SX C — Extra processes or additions code

www.termaheat.pl 20160108wolka page 4 of 5









# Legend



Available in chrome finish.



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator.

The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Optional connections available for this radiator.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.

www.termaheat.pl 20160108wolka page 5 of 5