






Angus DW 1620 x 600 colour: RAL 7012 Integrated thermostatic valve, straight, left, chrome SLIM thermostatic head, chrome Integrated pipe-masking set, chrome





design: Artes Design

#### **Connections:**



#### We recommend:

A set of integrated thermostatic valves for ZX, Y1 and Y8 connections




Integrated pipe-masking set



KTX 4 heating element



### Available sizes:





3


 $\updownarrow$ 

4

1300 x 440







## Specifications:


Working pressure: 0,8 MPa Maximum operating temperature: 95°C


A ≎	B ↔	C1 [mm]	C2 [mm]	75 65 20°c [W]	55 45 20°c [W]	(W)	E [mm]	F [mm]	[dm³]	<b>(</b> kg]	Product Configuration Code
1140	360	50	320	421	219	400	940	100	5,18	11,20	WGANS114036
1300	440	50	400	557	291	600	1100	100	6,92	14,96	WGANS130044
1460	520	50	480	711	372	800	1260	100	8,88	19,20	WGANS146052
1620	600	50	560	905	477	1000	1420	100	11,07	23,93	WGANS162060
1780	680	50	640	1116	595	1200	1580	100	13,48	29,14	WGANS178068











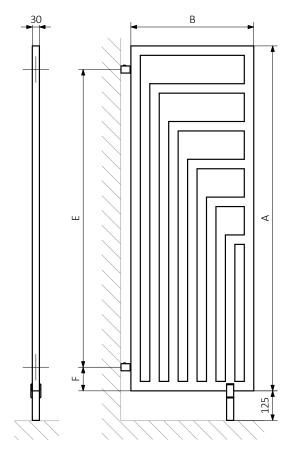




Y1



**Y8** 



 $\begin{array}{lll} A-Height & B-Width & C1-C5-Distance between pipe centres & D-Horizontal distance between mounting bracket centres \\ E-Vertical distance between mounting brackets & F-Distance between a mounting bracket and the bottom of the radiator \\ \end{array}$ 





www.termaheat.pl





Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

## The construction of a water and dual fuel radiator product and configuration code:

# WGALE054030

K916SX

PRODUCT CODE (located in the table for the product) CONFIGURATION CODE (supplemented by hand)

#### Configuration



K – carton box

## Zinc powder primer

C – Code of zinc powder primer is an extra processes

WLALE054030 K916SX C — Extra processes or additions code





#### Legend



Available in chrome finish.



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator. The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Optional connections available for this radiator.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.