





Cyklon V 1900 x 495 colour: RAL 5021 Integrated thermostatic valve, angled, left, chrome SLIM thermostatic head, chrome Integrated pipe-masking set, chrome





design: Maja Zalewska, Marek Kostykiewicz (M4M)

## **Connections:**

ΥP




We recommend: KUKA hanger

Integrated pipe-masking set





# Available sizes:

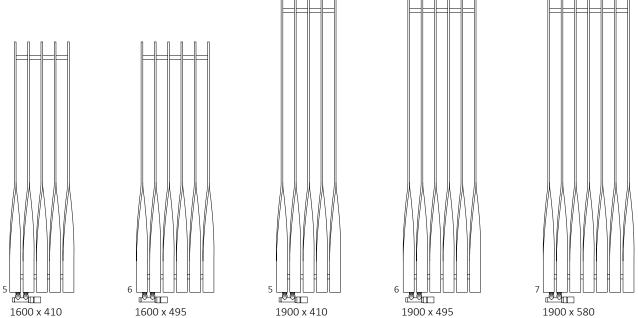

### Specifications:

Working pressure: 0,7 MPa Maximum operating temperature: 95°C

A ≎	$\stackrel{B}{\leftrightarrow}$	C1 [mm]	75 65 20℃ [₩]	55 45 20°c [W]	D [mm]	E [mm]	F [mm]	[dm³]	(Åg]	Product Configuration Code
1600	410	50	704	375	170	1400	100	3,98	20,53	WGCYV160041
1600	495	50	845	451	255	1400	100	4,78	24,66	WGCYV160049
1900	410	50	832	439	170	1700	100	4,67	24,12	WGCYV190041
1900	495	50	999	528	255	1700	100	5,61	28,97	WGCYV190049
1900	580	50	1166	616	340	1700	100	6,56	33,82	WGCYV190058


Included components: The radiator is sold with an integrated, angled thermostatic valve, SLIM thermostatic head and adapters for installation (Alupex  $\varnothing$  16x2 and copper  $\varnothing$  15). All valve components are finished in chrome.

 $\updownarrow$ 


 $\leftrightarrow$ 





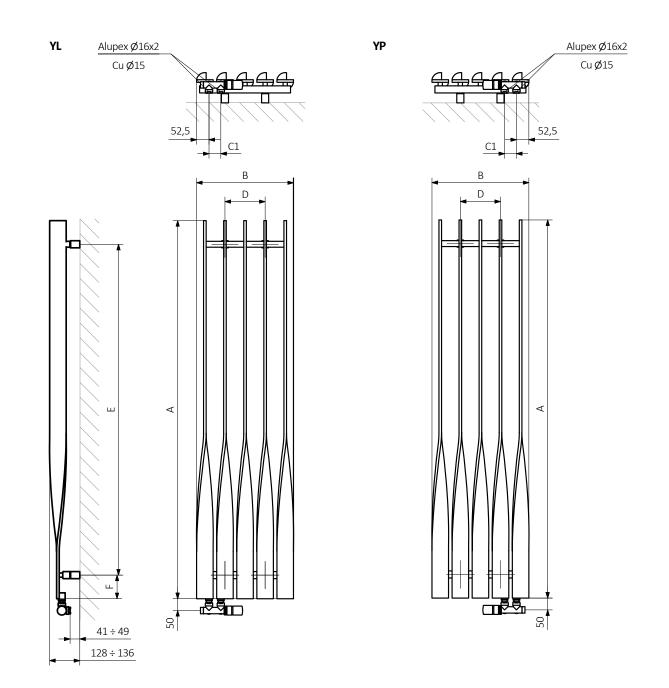

 $\begin{array}{lll} A-\mbox{Height} & B-\mbox{Width} & \mbox{C1-C5}-\mbox{Distance between pipe centres} & \mbox{D}-\mbox{Horizontal distance between mounting bracket centres} \\ E-\mbox{Vertical distance between mounting brackets} & \mbox{F}-\mbox{Distance between a mounting bracket and the bottom of the radiator} \\ \end{array}$ 

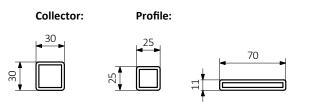





Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

# The construction of a water and dual fuel radiator product and configuration code:

# WGALE054030

K916SX

PRODUCT CODE (located in the table for the product) CONFIGURATION CODE (supplemented by hand)

#### Configuration



K – carton box

# Zinc powder primer

C – Code of zinc powder primer is an extra processes

WLALE054030 K916SX C — Extra processes or additions code





## Legend



Available in chrome finish.



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator. The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Optional connections available for this radiator.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.