


Intra M




Intra M 1700x640
colour: heban

Integrated thermostatic valve, angled, left, chrome
SLIM thermostatic head, chrome
Integrated pipe-masking set, chrome
ZIP V hanger

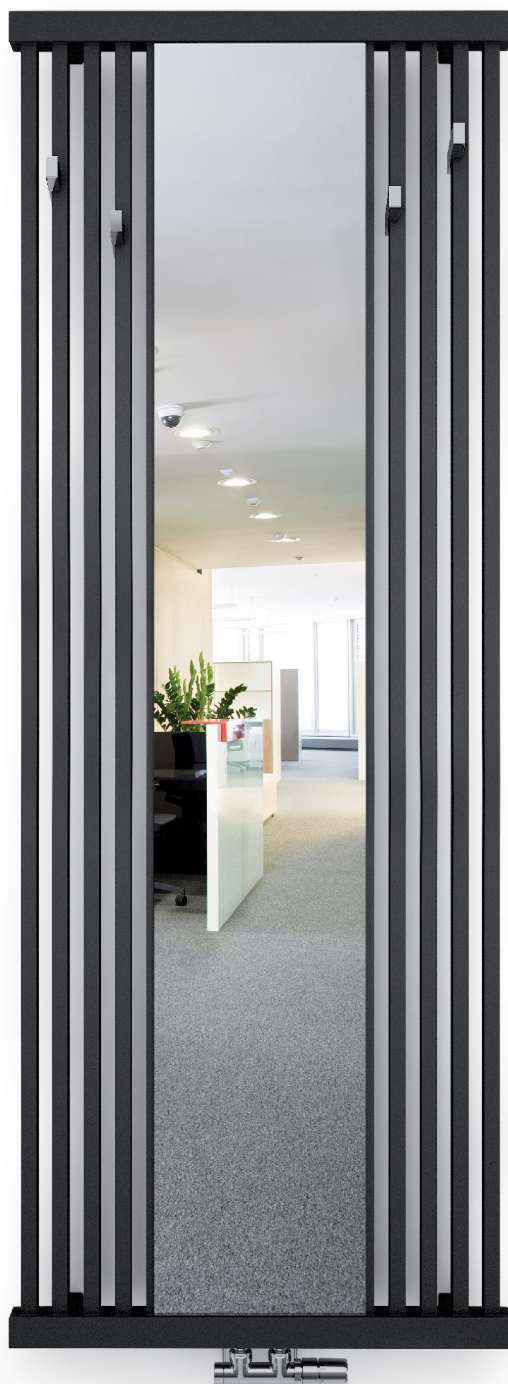

Connections:

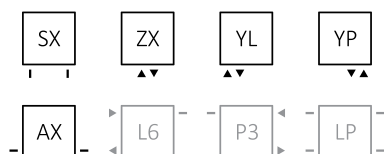


We recommend:

Integrated thermostatic valve set for ZX, YL and YP connections




Integrated pipe-masking set



ZIP V hanger



Available sizes:

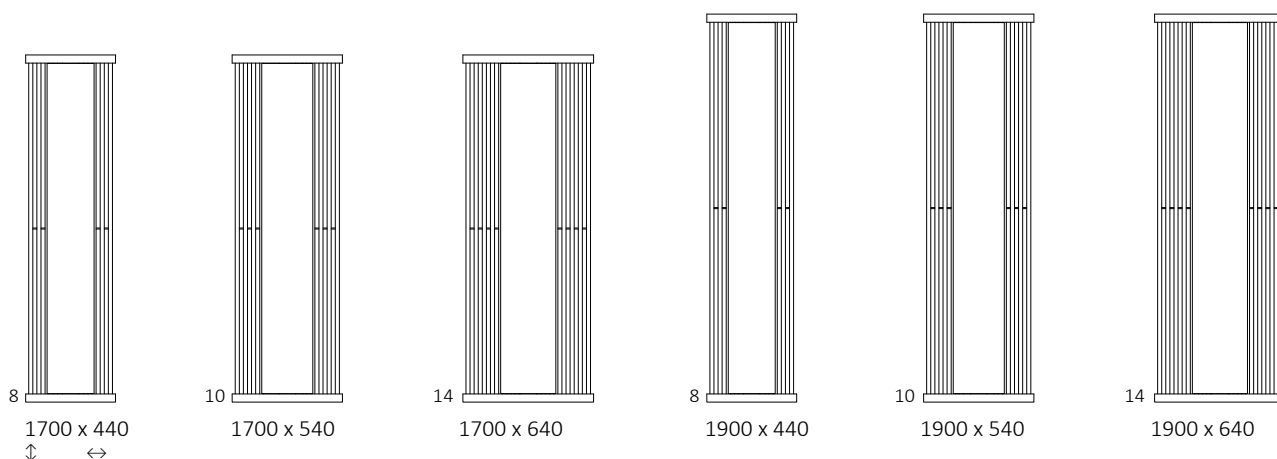

Specifications:


Working pressure: 0,8 MPa Maximum operating temperature: 95°C

A ↓	B ↔	C1 [mm]	C2 [mm]	C4 [mm]	75/65/20°C [W]	55/45/20°C [W]	D [mm]	E [mm]	F [mm]	[dm³]	[kg]	Product Code <small>Configuration codes: 4</small>
1700	440	50	400	440	528	269	300	1660	20	4,60	18,84	WGINT170044
1700	540	50	500	540	660	337	400	1660	20	5,73	21,99	WGINT170054
1700	640	50	600	640	925	472	500	1660	20	7,80	27,90	WGINT170064
1900	440	50	400	440	600	306	300	1860	20	5,06	20,89	WGINT190044
1900	540	50	500	540	762	388	400	1860	20	6,31	24,38	WGINT190054
1900	640	50	600	640	995	507	500	1860	20	8,60	30,95	WGINT190064


Intra M




AX

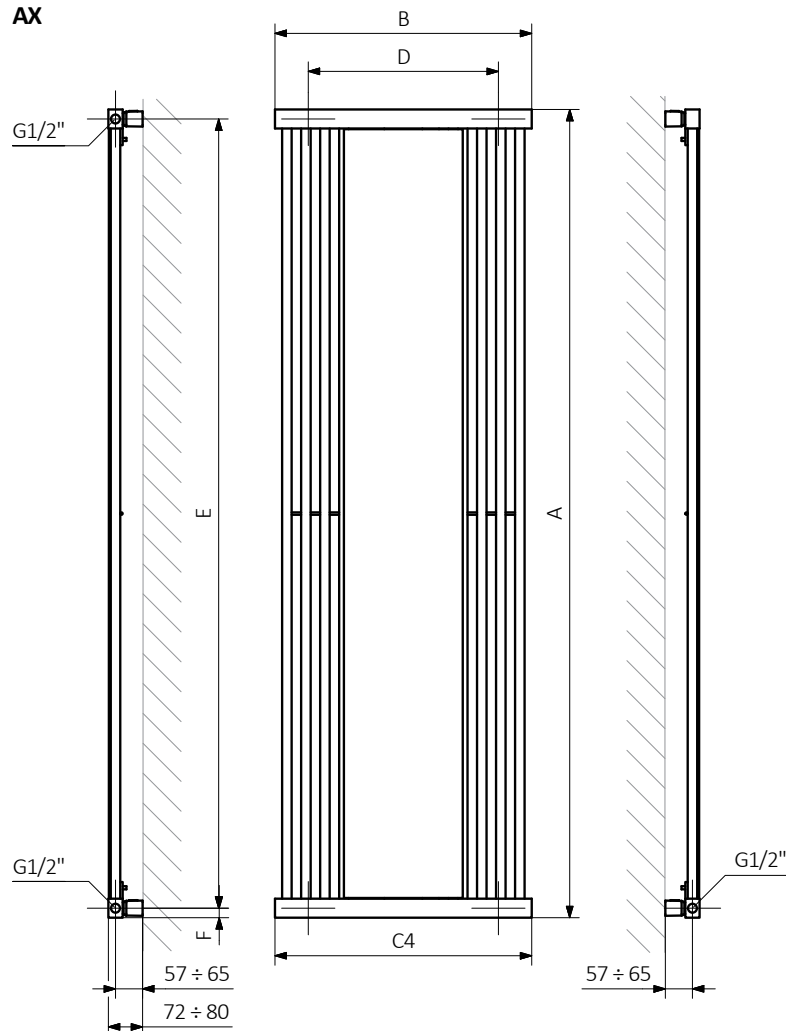


SX

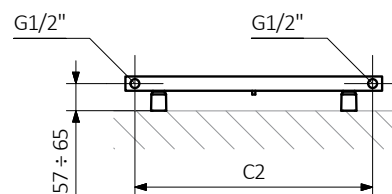


ZX

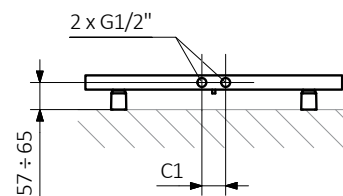

YL

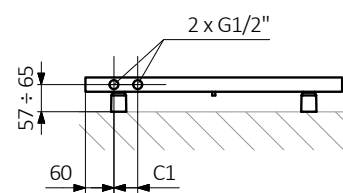


YP

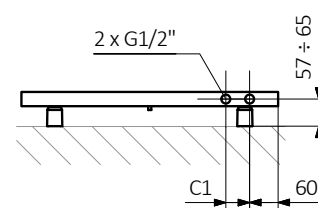

A — Height B — Width C1-C5 — Distance between pipe centres D — Horizontal distance between mounting bracket centres
E — Vertical distance between mounting brackets F — Distance between a mounting bracket and the bottom of the radiator

Collector:

Profile:

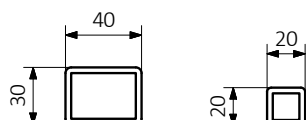



Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

The construction of a water and dual fuel radiator product and configuration code:


WGALE054030

K916SX

PRODUCT CODE
(located in the table for the product)

CONFIGURATION CODE
(supplemented by hand)

Configuration

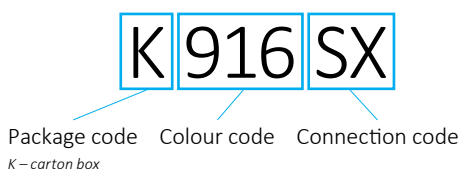

Construction of electric heater configuration code


WLALE054030

K916E1DRYM

PRODUCT CODE
(located in the table for the product)

CONFIGURATION CODE
(supplemented by hand)

Configuration

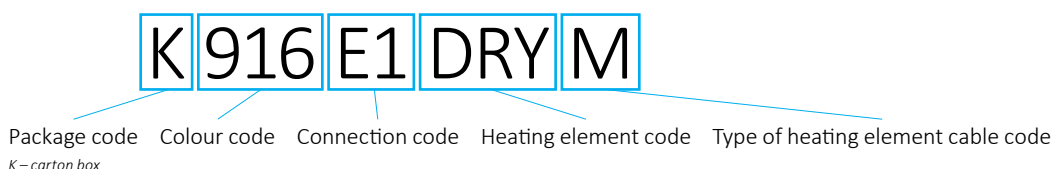

Zinc powder primer

C – Code of zinc powder primer is an extra processes

WLALE054030 K916SX **C** — Extra processes or additions code



Legend



Available in chrome finish.




Radiator available in a “water” version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a ‘heating medium’ and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator.
The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Optional connections available for this radiator.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.