









Neo 545 x 1500 colour: RAL 7042, RAL 1021 Integrated lockshield valve, angled, chrome SLIM thermostatic head, chrome Integrated pipe-masking set, chrome SIM heating element










design: Karol Murlak

Connections:

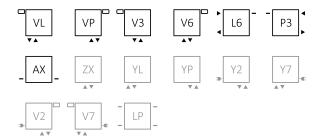

Electric radiators:



We recommend:

Zestaw zintegrowany odcinający dla podłączeń VL, VP, V3 i V6



SIM heating element



Integrated pipe-masking set



Specifications:

Working pressure: 0,8 MPa Maximum operating temperature: 95°C

A	$\begin{matrix} B \\ \leftrightarrow \end{matrix}$	C1 [mm]	C3 [mm]	C4 [mm]	75 65 20°c [W]	55 45 20℃ [W]	[W]	D [mm]	E [mm]	F [mm]	[dm³]	 [kg]	Product configuration codes.7
545	600	50	500	593	560	286	600	300	225	160	2,55	15,20	WGN01054060
545	750	50	500	743	700	357	800	450	225	160	3,19	19,00	WGN01054075
545	900	50	500	893	840	428	800	600	225	160	3,82	22,80	WGN01054090
545	1050	50	500	1043	980	500	1000	750	225	160	4,46	26,60	WGN01054105
545	1200	50	500	1193	1120	571	1200	900	225	160	5,10	30,40	WGN01054120
545	1350	50	500	1343	1260	643	1200	1050	225	160	5,73	34,20	WGN01054135
545	1500	50	500	1493	1400	714	1500	1200	225	160	6,37	38,00	WGN01054150
545	1650	50	500	1643	1540	785	1500	1350	225	160	7,01	41,80	WGN01054165
545	1800	50	500	1793	1680	857	1500	1500	225	160	7,64	45,60	WGN01054180
545	1950	50	500	1943	1820	928	1500	1650	225	160	8,28	49,40	WGN01054195
545 545 545 545 545 545 545 545	750 900 1050 1200 1350 1500 1650 1800	50 50 50 50 50 50 50 50	500 500 500 500 500 500 500	743 893 1043 1193 1343 1493 1643 1793	700 840 980 1120 1260 1400 1540 1680	357 428 500 571 643 714 785 857	800 800 1000 1200 1200 1500 1500	450 600 750 900 1050 1200 1350	225 225 225 225 225 225 225 225 225 225	160 160 160 160 160 160 160	3,19 3,82 4,46 5,10 5,73 6,37 7,01 7,64	19,00 22,80 26,60 30,40 34,20 38,00 41,80 45,60	WGN0105407 WGN0105410 WGN0105412 WGN0105413 WGN0105415 WGN0105416 WGN0105418

www.termaheat.pl 20160107wolka page 2 of 8
















Available sizes:






















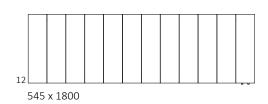

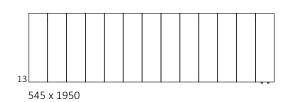

 \updownarrow \leftrightarrow










Colour included in the price


ΑX




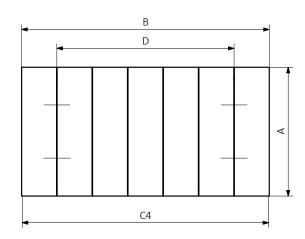





VL

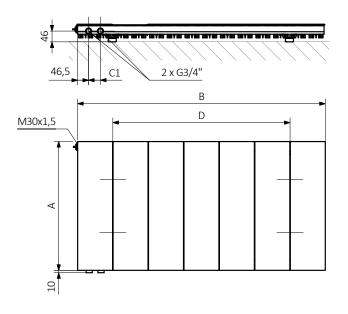




 $A-Height \quad B-Width \quad C1-C5-Distance \ between \ pipe \ centres \quad D-Horizontal \ distance \ between \ mounting \ bracket \ centres \\ E-Vertical \ distance \ between \ mounting \ brackets \quad F-Distance \ between \ a \ mounting \ bracket \ and \ the \ bottom \ of \ the \ radiator$















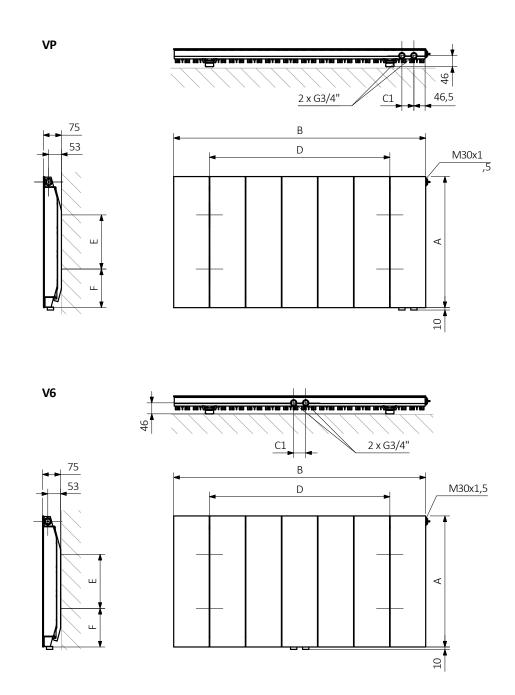

 $A- Height \quad B- Width \quad C1-C5- Distance \ between \ pipe \ centres \quad D- Horizontal \ distance \ between \ mounting \ bracket \ centres \\ E- Vertical \ distance \ between \ mounting \ brackets \quad F- Distance \ between \ a \ mounting \ bracket \ and \ the \ bottom \ of \ the \ radiator$

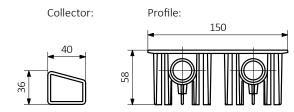


www.termaheat.pl 20160107wolka page 5 of 8











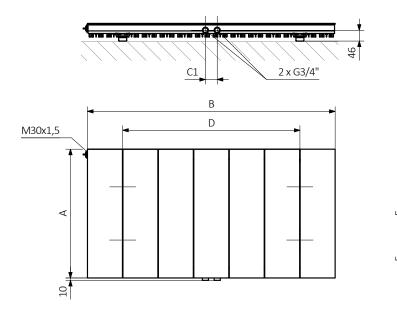




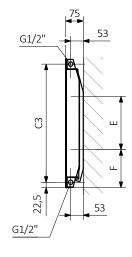


В

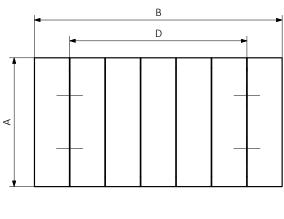


L6

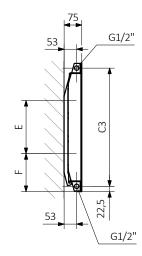


A-Height B-Width C1-C5-Distance between pipe centres D-Horizontal distance between mounting bracket centres ${\sf E-Vertical\ distance\ between\ mounting\ brackets}\quad {\sf F-Distance\ between\ a\ mounting\ bracket\ and\ the\ bottom\ of\ the\ radiator}$













Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:


The construction of a water and dual fuel radiator product and configuration code:

WGAI F054030

K916SX

PRODUCT CODE (located in the table for the product) CONFIGURATION CODE (supplemented by hand)

Configuration



Package code Colour code Connection code

K – carton box

Construction of electric heater configuration code

WLALE054030

K916E1DRYM

PRODUCT CODE (located in the table for the product) **CONFIGURATION CODE** (supplemented by hand)

Configuration



Package code Colour code Connection code Heating element code Type of heating element cable code K – carton box

Zinc powder primer

C – Code of zinc powder primer is an extra processes

WLALE054030 K916SX C-



Extra processes or additions code


www.termaheat.pl 20160107wolka page 7 of 8













Legend



Available in chrome finish.



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator.

The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Optional connections available for this radiator.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.

www.termaheat.pl 20160107wolka page 8 of 8