

Triga AW 1700 x 430 colour: RAL 3015

Integrated thermostatic valve, angled, left, chrome SLIM thermostatic head, chrome Integrated pipe-masking set, chrome







design: Terma

Connections:



We recommend:

A set of integrated thermostatic valves for ZX connection




Integrated pipe-masking set


ZIP V hanger





Available sizes:





Specifications:

Working pressure: 1,0 MPa Maximum operating temperature: 95°C


A	B ↔	C1 [mm]	75 65 20°c [W]	55 45 20°c [W]	(W)	D [mm]	E [mm]	F [mm]	[dm³]	<u></u>	Product configuration codes. 4
1700	430	50	1122	583	1200	240	1600	50	14,33	26,93	WGVRA170043
1900	430	50	1255	652	1200	240	1800	50	15,93	29,79	WGVRA190043

www.termaheat.pl 20160107wolka page 2 of 5







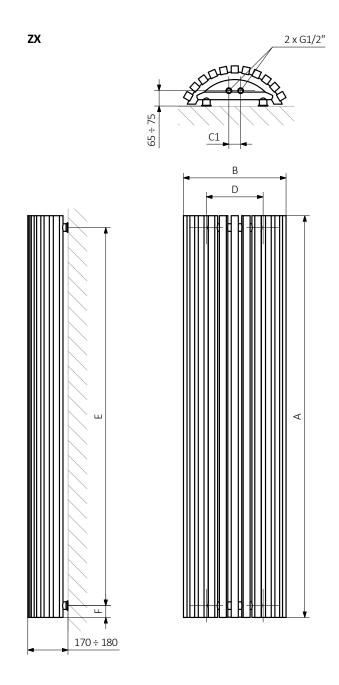

 $A- Height \quad B- Width \quad C1- C5- Distance \ between \ pipe \ centres \quad D- Horizontal \ distance \ between \ mounting \ bracket \ centres \\ E- Vertical \ distance \ between \ mounting \ brackets \quad F- Distance \ between \ a \ mounting \ bracket \ and \ the \ bottom \ of \ the \ radiator$

Collector: Profile:







Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

The construction of a water radiator product and configuration code:

WGALE054030

K916SX

PRODUCT CODE (located in the table for the product)

CONFIGURATION CODE (supplemented by hand)

Configuration



Zinc powder primer

C – Code of zinc powder primer is an extra processes

WLALE054030 K916SX C — Extra processes or additions code

www.termaheat.pl 20160107wolka page 4 of 5







Legend



www.termaheat.pl 20160107wolka page 5 of 5