

Dexter




Dexter 1220 x 600
colour: *sparkling gray*


Dexter thermostatic valve set, right, chrome
SLIM thermostatic head, chrome




Connections:



Electric radiators:






Available sizes:

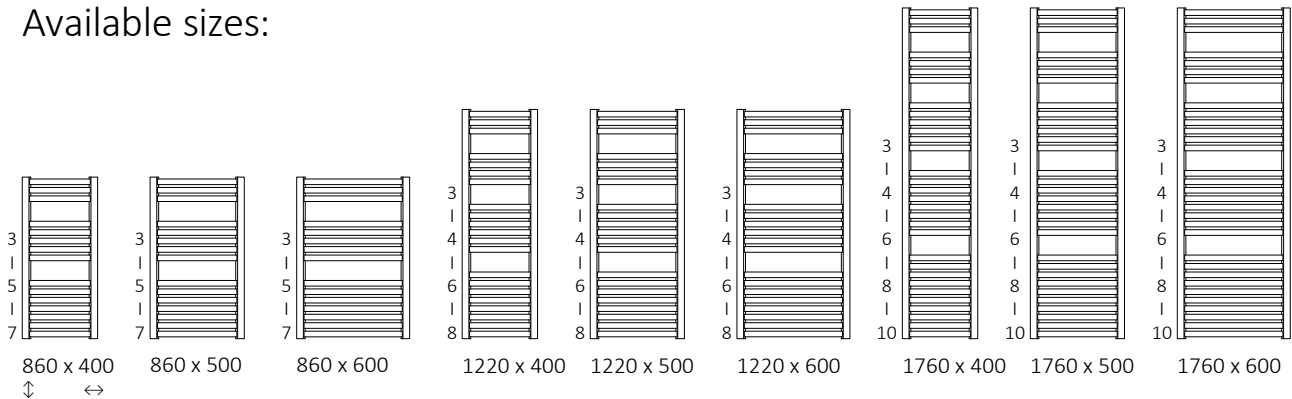

Specifications:

Working pressure: 0,8 MPa Maximum operating temperature: 95°C



A ↓	B ↔	C1 [mm]	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	[W]	D [mm]	E [mm]	F [mm]	[dm³]	[kg]	Product Code Configuration codes: 4
Powder coating												
860	400	50	357	338	178	400	350	680	90	2,70	7,07	WGDEX086040
860	500	50	457	422	222	400	450	680	90	2,99	8,35	WGDEX086050
860	600	50	557	510	269	600	550	680	90	3,27	9,64	WGDEX086060
1220	400	50	357	453	241	400	350	1040	90	3,82	9,89	WGDEX122040
1220	500	50	457	567	301	600	450	1040	90	4,21	11,69	WGDEX122050
1220	600	50	557	676	359	800	550	1040	90	4,61	13,49	WGDEX122060
1760	400	50	357	646	341	600	350	1580	90	5,55	14,40	WGDEX176040
1760	500	50	457	807	426	800	450	1580	90	6,14	17,05	WGDEX176050
1760	600	50	557	971	512	1000	550	1580	90	6,72	19,71	WGDEX176060
Plated finishes												
860	400	50	357	225	117	200	350	680	90	2,70	7,07	WGDEX086040
860	500	50	457	281	147	300	450	680	90	2,99	8,35	WGDEX086050
860	600	50	557	337	176	400	550	680	90	3,27	9,64	WGDEX086060
1220	400	50	357	298	155	300	350	1040	90	3,82	9,89	WGDEX122040
1220	500	50	457	373	194	400	450	1040	90	4,21	11,69	WGDEX122050
1220	600	50	557	448	233	400	550	1040	90	4,61	13,49	WGDEX122060
1760	400	50	357	421	218	400	350	1580	90	5,55	14,40	WGDEX176040
1760	500	50	457	526	273	600	450	1580	90	6,14	17,05	WGDEX176050
1760	600	50	557	631	327	600	550	1580	90	6,72	19,71	WGDEX176060

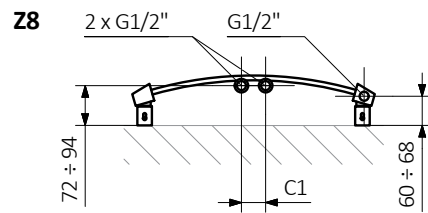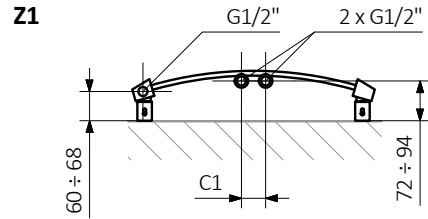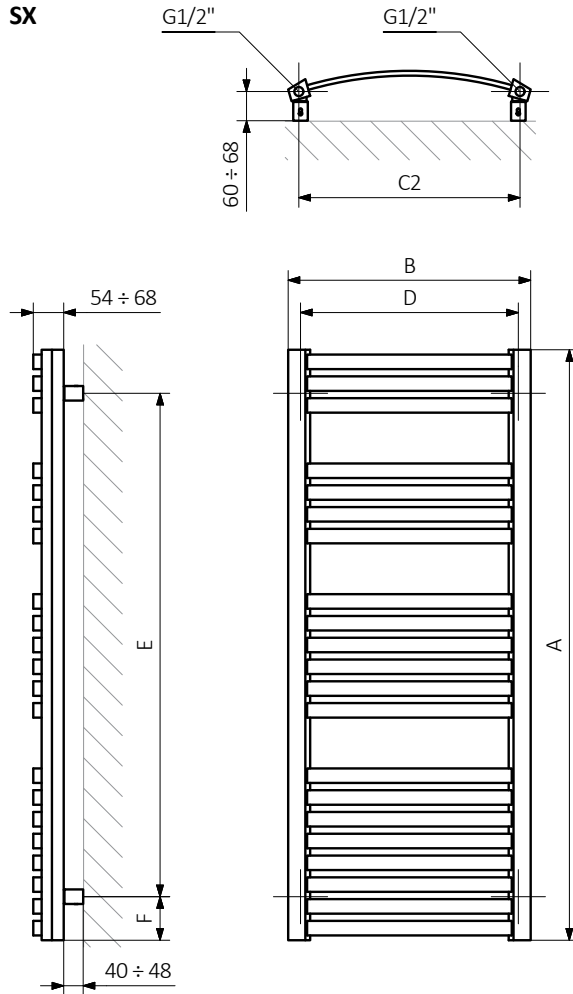

A — Height B — Width C1-C5 — Distance between pipe centres D — Horizontal distance between mounting bracket centres
 E — Vertical distance between mounting brackets F — Distance between a mounting bracket and the bottom of the radiator

Collector:

Profile:





Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

The construction of a water and dual fuel radiator product and configuration code:

WGALE054030

PRODUCT CODE
(located in the table for the product)

K916SX

CONFIGURATION CODE
(supplemented by hand)

Configuration

K 916 SX

Package code Colour code Connection code
K – carton box

Construction of electric heater configuration code

WLALE054030

PRODUCT CODE
(located in the table for the product)

K916E1DRYM

CONFIGURATION CODE
(supplemented by hand)

Configuration

K 916 E1 DRY M

Package code Colour code Connection code Heating element code Type of heating element cable code
K – carton box

Zinc powder primer

C – Code of zinc powder primer is an extra processes

WLALE054030 K916SX **C** – Extra processes or additions code



Legend



Available in chrome finish.



Radiator available in a “water” version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a ‘heating medium’ and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator.
The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Optional connections available for this radiator.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.