


POC 2




POC 2 1040 x 500
colour: *california beige*


MOA heating element, satin

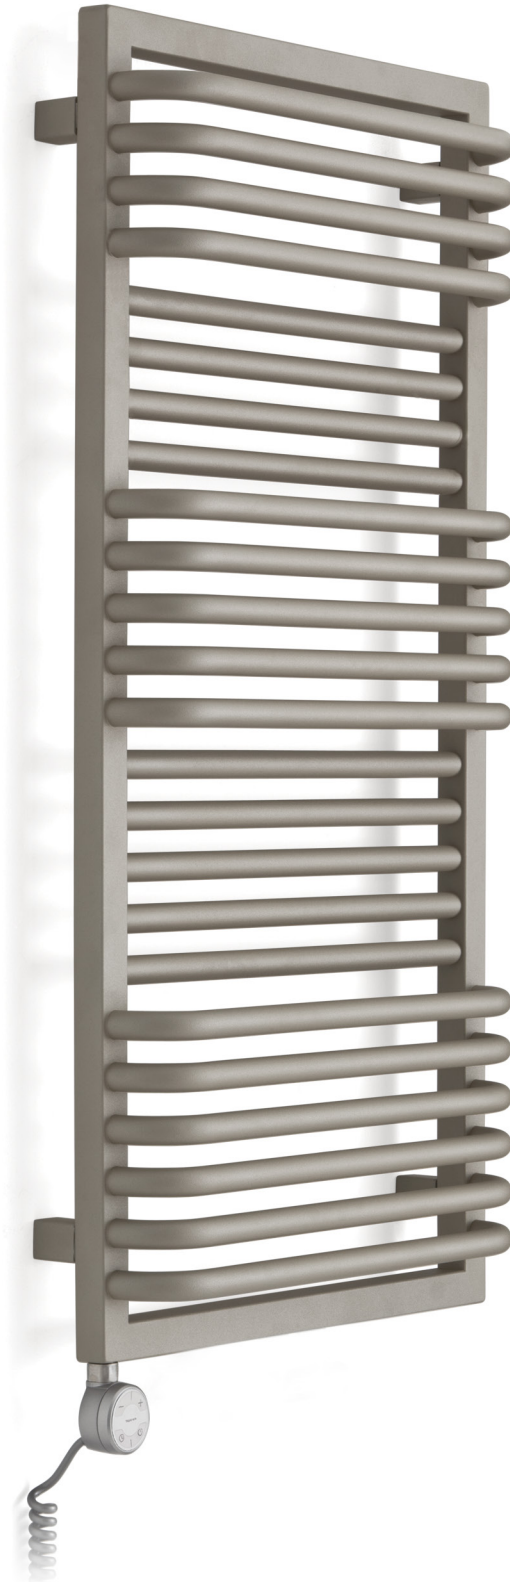

Connections:

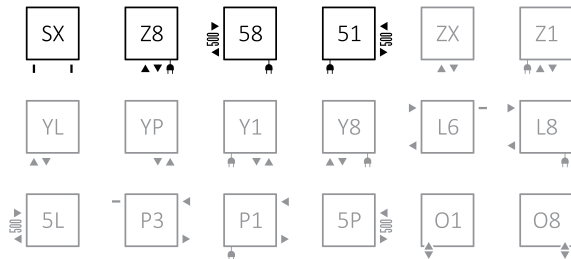

Electric radiators:




We recommend:

3-axis regulating valve set for SX connection



Integrated pipe-masking set



MOA heating element



Specifications:


Working pressure: 1,0 MPa Maximum operating temperature: 95°C

A ↓	B ↔	C1 [mm]	C2 [mm]	C5 [mm]	75/65/20°C [W]	55/45/20°C [W]	⊙ [W]	D [mm]	E [mm]	F [mm]	∪ [dm³]	⚖️ [kg]	Product Code Configuration codes: 6
600	450	50	420	500	308	167	300	420	420	90	3,19	6,23	WGZUL060045
600	500	50	470	500	342	185	400	470	420	90	3,45	6,78	WGZUL060050
600	600	50	570	500	410	222	400	570	420	90	3,99	7,87	WGZUL060060
840	450	50	420	500	443	239	400	420	660	90	4,29	8,42	WGZUL084045
840	500	50	470	500	493	266	600	470	660	90	4,64	9,16	WGZUL084050
840	600	50	570	500	590	318	600	570	660	90	5,36	10,64	WGZUL084060
840	700	50	670	500	690	372	800	670	660	90	6,07	12,11	WGZUL084070
1040	450	50	420	500	556	299	600	420	860	90	5,26	10,38	WGZUL104045
1040	500	50	470	500	618	332	600	470	860	90	5,70	11,28	WGZUL104050
1040	600	50	570	500	743	399	800	570	860	90	6,56	13,07	WGZUL104060
1040	700	50	670	500	866	465	800	670	860	90	7,42	14,87	WGZUL104070
1240	450	50	420	500	669	359	800	420	1060	90	6,19	12,22	WGZUL124045
1240	500	50	470	500	744	399	800	470	1060	90	6,70	13,28	WGZUL124050
1240	600	50	570	500	893	479	1000	570	1060	90	7,71	15,40	WGZUL124060
1240	700	50	670	500	1041	559	1000	670	1060	90	8,72	17,51	WGZUL124070
1400	500	50	470	500	844	452	800	470	1220	90	7,53	14,96	WGZUL140050
1400	600	50	570	500	1013	543	1000	570	1220	90	8,66	17,34	WGZUL140060
1400	700	50	670	500	1182	633	1200	670	1220	90	9,79	19,71	WGZUL140070


POC 2




Available sizes:




600 x 450




600 x 500




600 x 600




840 x 450




840 x 500




840 x 600




840 x 700




1040 x 450




1040 x 500




1040 x 600




1040 x 700




1240 x 450




1240 x 500




1240 x 600




1240 x 700



1400 x 500




1400 x 600






1400 x 700



SX

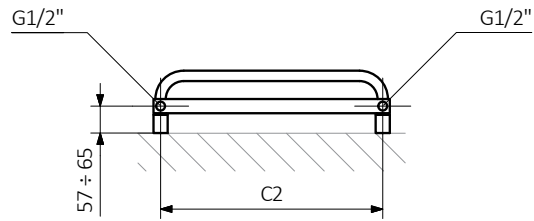



51

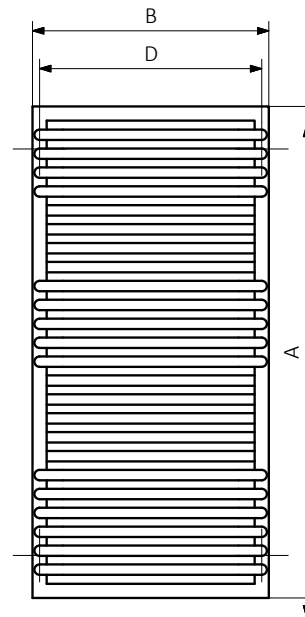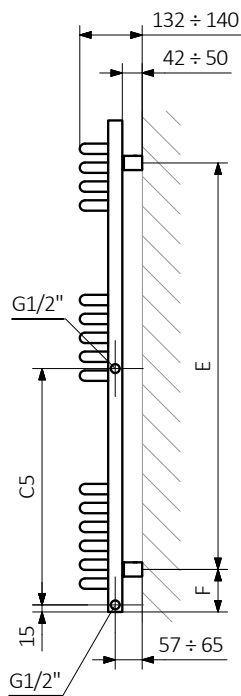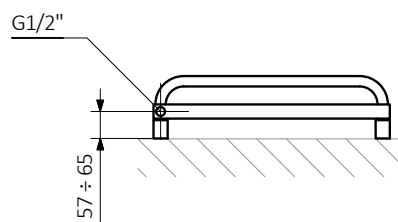





A — Height B — Width C1-C5 — Distance between pipe centres D — Horizontal distance between mounting bracket centres
E — Vertical distance between mounting brackets F — Distance between a mounting bracket and the bottom of the radiator

Collector:

Profile:





POC 2

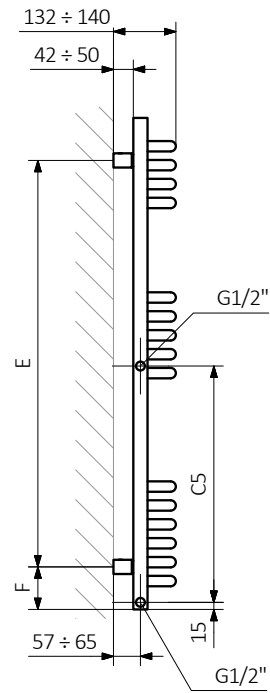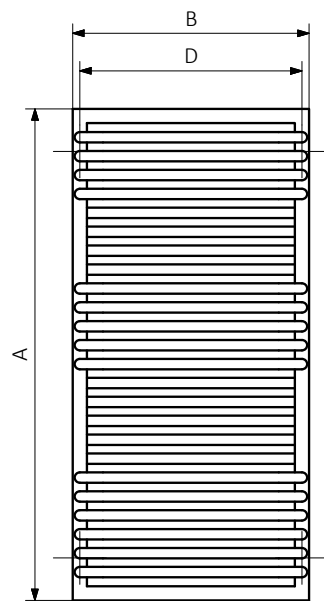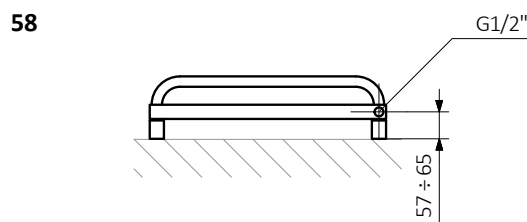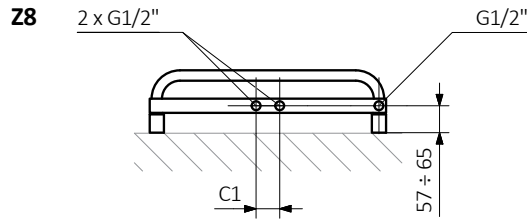

A — Height B — Width C1-C5 — Distance between pipe centres D — Horizontal distance between mounting bracket centres
 E — Vertical distance between mounting brackets F — Distance between a mounting bracket and the bottom of the radiator

Collector:

Profile:





Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

The construction of a water and dual fuel radiator product and configuration code:

WGALE054030

PRODUCT CODE
(located in the table for the product)

K916SX

CONFIGURATION CODE
(supplemented by hand)

Configuration

K 916 SX

Package code Colour code Connection code
K – carton box

Construction of electric heater configuration code

WLALE054030

PRODUCT CODE
(located in the table for the product)

K916E1DRYM

CONFIGURATION CODE
(supplemented by hand)

Configuration

K 916 E1 DRY M

Package code Colour code Connection code Heating element code Type of heating element cable code
K – carton box

Zinc powder primer

C – Code of zinc powder primer is an extra processes

WLALE054030 K916SX **C** – *Extra processes or additions code*



Legend



Available in chrome finish.



Radiator available in a “water” version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a ‘heating medium’ and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator.
The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Optional connections available for this radiator.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.