Outcorner









Outcorner 1005 x 300 colour: winter sky

Integrated thermostatic valve with immersion tube, angled, right, satin KTX 4 heating element, satin

Outcorner







design: Krzysztof Kotłowski

Integrated

pipe-masking set

Connections:

A \$ 465÷1545:



A ↑ 735÷1545:



Electric radiators:



We recommend:

A set of integrated thermostatic valves with immersion tube for SX connection




ZIP H hanger





MOA heating element





Available sizes:











Specifications:

Working pressure: 1,0 MPa Maximum operating temperature: 95°C

A	$\begin{matrix} B \\ \leftrightarrow \end{matrix}$	C2 [mm]	75 65 20°c [W]	55 45 20°c [W]	(W)	D [mm]	E [mm]	F [mm]	[dm³]	 [kg]	Product configuration codes. 4
465	300	195	294	160	300	195	315	76	1,56	5,32	WGQON046030
735	300	195	421	228	400	195	585	76	2,39	8,08	WGQON073030
1005	300	195	547	294	600	195	855	76	3,22	10,84	WGQON100030
1275	300	195	673	361	800	195	1125	76	4,05	13,60	WGQON127030
1545	300	195	799	428	800	195	1395	76	4,89	16,36	WGQON154030

www.termaheat.pl 20160107wolka page 2 of 5


Outcorner









SX



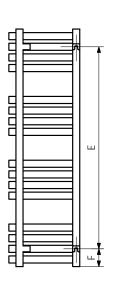

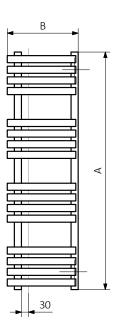

 $A-Height \quad B-Width \quad C1-C5-Distance \ between \ pipe \ centres \quad D-Horizontal \ distance \ between \ mounting \ bracket \ centres \\ E-Vertical \ distance \ between \ mounting \ brackets \quad F-Distance \ between \ a \ mounting \ bracket \ and \ the \ bottom \ of \ the \ radiator$

Collector:


Profile:













Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

The construction of a water and dual fuel radiator product and configuration code:

WGALE054030

K916SX

PRODUCT CODE (located in the table for the product)

CONFIGURATION CODE (supplemented by hand)

Configuration



Package code Colour code Connection code K-carton box

Construction of electric heater configuration code


WLALE054030

K916E1DRYM

PRODUCT CODE (located in the table for the product)

CONFIGURATION CODE (supplemented by hand)

Configuration



Package code Colour code Connection code Heating element code Type of heating element cable code κ -carton box

Zinc powder primer

C – Code of zinc powder primer is an extra processes

WLALE054030 K916SX C Extra processes or additions code

www.termaheat.pl 20160107wolka page 4 of 5




Capacity.







Legend

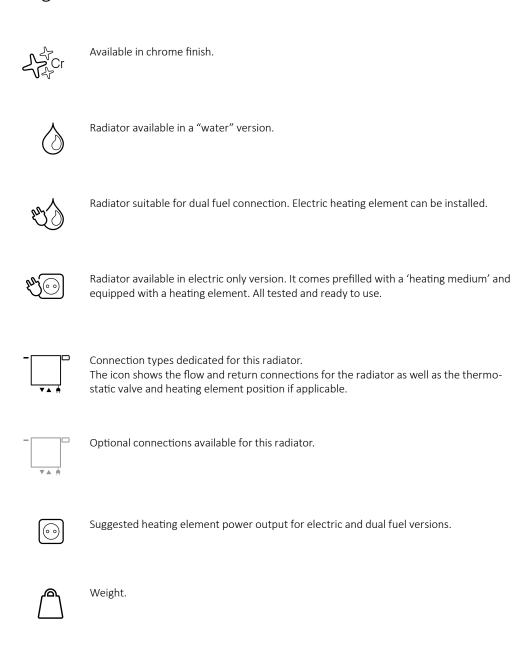

www.termaheat.pl 20160107wolka page 5 of 5