


Ribbon VE 1800 x 290 colour: RAL 2004

SIM heating element







design: Terma

Connections:





We recommend:


MOA heating element



Available sizes:







Specifications:


A	$\begin{matrix} B \\ \leftrightarrow \end{matrix}$	(w)	D [mm]	E [mm]	F [mm]	[dm³]		Product configuration codes, 4
1800	290	600	100	1660	70	3,33	27,11	WLRVE180029
1800	390	800	200	1660	70	4,45	36,16	WLRVE180039
1800	490	1000	300	1660	70	5,57	45,21	WLRVE180049


www.termaheat.pl 20160107wolka page 2 of 5
















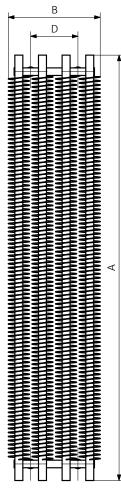

 $A-Height \quad B-Width \quad C1-C5-Distance \ between \ pipe \ centres \quad D-Horizontal \ distance \ between \ mounting \ bracket \ centres \\ E-Vertical \ distance \ between \ mounting \ brackets \quad F-Distance \ between \ a \ mounting \ bracket \ and \ the \ bottom \ of \ the \ radiator$

Collector: Profile:





www.termaheat.pl 20160107wolka page 3 of 5





Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

Construction of electric heater configuration code

WLALE054030

K916E1DRYM

PRODUCT CODE (located in the table for the product)

CONFIGURATION CODE (supplemented by hand)

Configuration



Package code Colour code Connection code Heating element code Type of heating element cable code K-carton box

Zinc powder primer

C – Code of zinc powder primer is an extra processes


WLALE054030 K916SX C — Extra processes or additions code

www.termaheat.pl 20160107wolka page 4 of 5










Capacity.

Legend

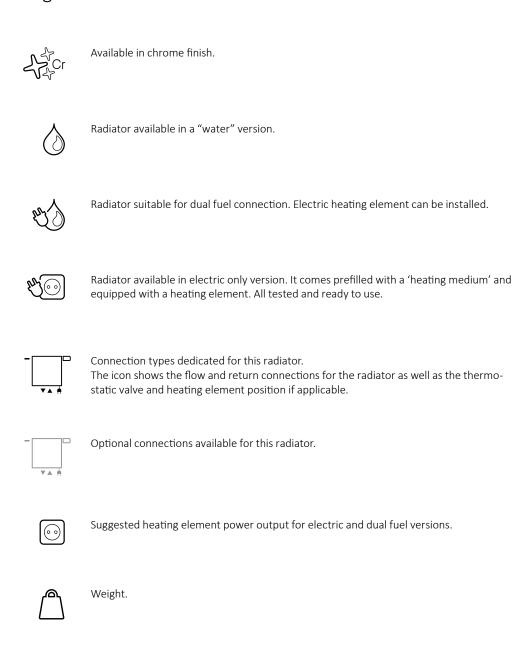

www.termaheat.pl 20160107wolka page 5 of 5