

Jade m



Jade m 753 x 600
colour: chrome

Heating Element MOA, chrome



Connections:


A ↓ 465÷1545:



Electric radiators,



Available sizes:

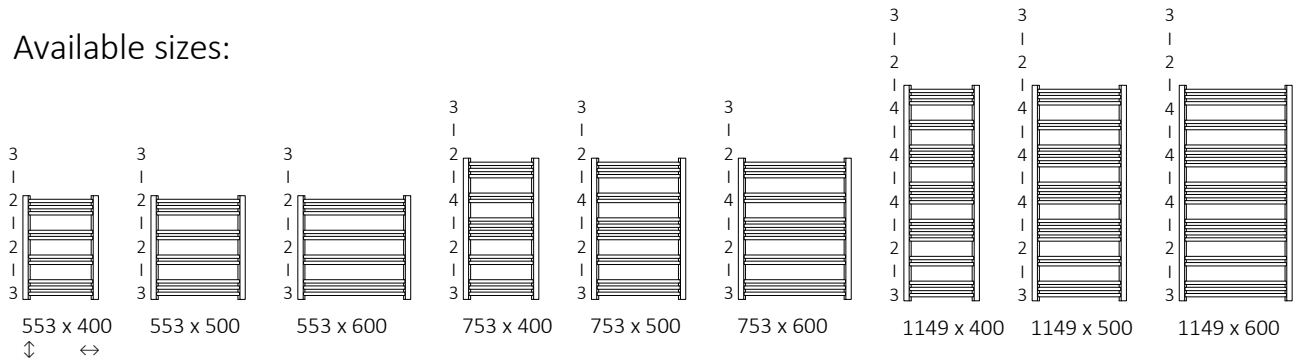




Specification:

Working pressure: 1,0 MPa Maximum operating temperature: 95°C

A ↓	B ↔	C2 [mm]	75 65 20°C [W]	55 45 20°C [W]	[W]	D [mm]	E [mm]	F [mm]	[dm³]	[kg]	Product code Configuration code p. 4
powder paint											
553	400	364	193	98	200	240	394	79,5	1,46	3,25	WGJAM055040
553	500	464	241	123	300	340	394	79,5	1,65	3,78	WGJAM055050
553	600	564	289	147	300	440	394	79,5	1,84	4,30	WGJAM055060
753	400	364	249	127	300	240	594	79,5	2,01	4,47	WGJAM075040
753	500	464	311	159	300	340	594	79,5	2,28	5,20	WGJAM075050
753	600	564	373	190	400	440	594	79,5	2,55	5,93	WGJAM075060
1149	400	364	361	184	400	240	990	79,5	3,11	6,89	WGJAM114040
1149	500	464	451	230	400	340	990	79,5	3,54	8,05	WGJAM114050
1149	600	564	541	276	600	440	990	79,5	3,95	9,19	WGJAM114060
Plated finishes											
553	400	364	135	69	120	240	394	79,5	1,46	3,25	WGJAM055040
553	500	464	169	86	200	340	394	79,5	1,65	3,78	WGJAM055050
553	600	564	202	103	200	440	394	79,5	1,84	4,30	WGJAM055060
753	400	364	174	89	200	240	594	79,5	2,01	4,47	WGJAM075040
753	500	464	218	111	200	340	594	79,5	2,28	5,20	WGJAM075050
753	600	564	261	133	300	440	594	79,5	2,55	5,93	WGJAM075060
1149	400	364	252	129	300	240	990	79,5	3,11	6,89	WGJAM114040
1149	500	464	315	161	300	340	990	79,5	3,54	8,05	WGJAM114050
1149	600	564	379	193	400	440	990	79,5	3,95	9,19	WGJAM114060




SX

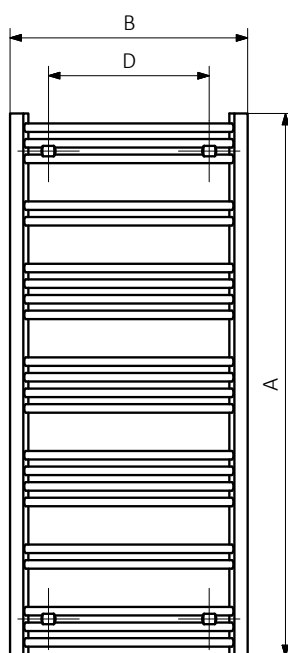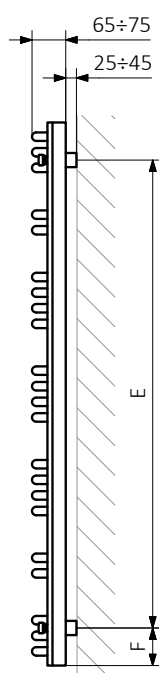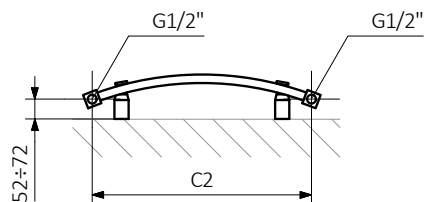

A – height B – width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres
 E – Vertical distance between mounting brackets F – Distance between mounting bracket and the bottom of the radiator

Collector:

Profile:





Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

The construction of a water and dual fuel radiator product and configuration code:

WGALE054030

K916SX

PRODUCT CODE
(located in the table for the product)

CONFIGURATION CODE
(supplemented by hand)

Configuration

K 916 SX

Package code Colour code Connection code
K – carton box

Construction of electric heater configuration code

WLALE054030

K916E1DRYM

PRODUCT CODE
(located in the table for the product)

CONFIGURATION CODE
(supplemented by hand)

Configuration

K 916 E1 DRY M

Package code Colour code Connection code Heating element code Type of heating element cable code
K – carton box

Zinc powder primer

C – Code of zinc powder primer is an extra processes

WLALE054030 K916SX **C** – Extra processes or additions code



Legend



Available in chrome finish.



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator.
The icon shows the flow and return connections for the radiator as well as the thermostat and heating element position if applicable.



Optional connections available for this radiator.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.